

BRILLIANCE DIMMER

DESCRIPTION:

The Brilliance Dimmer Switch provides for 12VAC dimming up to 120 watts. This unit can be mounted next to the 12VAC transformer or anywhere out in the field.

FEATURES:

- Installs in single-gang deep junction box on low-voltage side of magnetic step-down transformer
- Current capacity: 10 Amps
- Compatible with all Brilliance LED lamps
- Must be installed in a deep junction box
- Always use supplied gasket
- No minimum load
- Dimmer range may vary depending upon load that is applied


Wattage	120
Operating Range	12VAC



PART NUMBER:
12 VAC Brilliance Dimmer Switch

For optimum performance, the installers can adjust the internal trimpot. This is accomplished by:

1. Install and connect all LEDs.
2. Select the best transformer tap to provide 12 Volts to the LEDs.
3. Turn the pot-switch on, but turn the pot to the lowest brightness setting (counter-clockwise).
4. Adjust the trimpot clockwise until the LEDs just light.
5. Reduce the trimpot until the LEDs just go off.

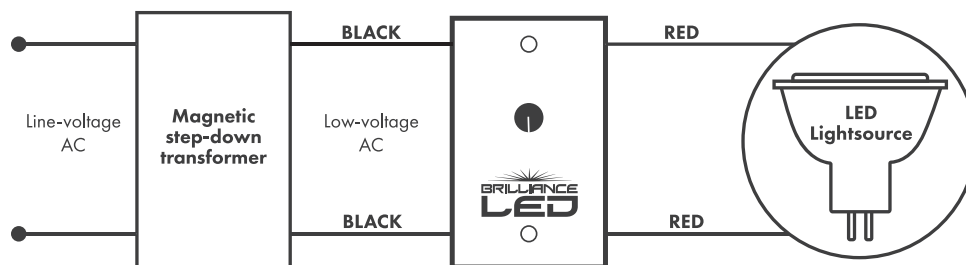

7202 E. Cave Creek Rd, Suite 3A | P.O. Box 2281 | Carefree, AZ 85377
T. 800.867.2108 | F. 480.575.0078 | www.brillianceled.com